

## Technical bulletin


---

## TB-004

### ATTENTION!

This starter motor must be mounted with a new location bush.

Always remove the old bush, which could remain in the engine block on removal of the old starter.

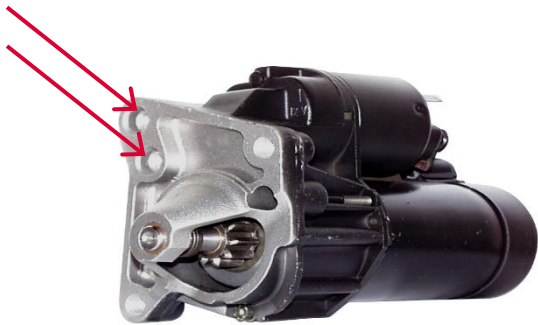

The location dowel accurately aligns the correct engagement position.

A worn or missing dowel will allow the starter to become misaligned which could cause noisy operation or starter-ring damage.

The starter can fit several applications, so ensure you use the correct dowel hole for your engine.